


TECALAN – low temperature hose

Type AF...HH

for pneumatic- and high pressure hydraulic applications and as feed pipe for technical fluids. High flexibility by subzero temperatures

Abrasion resistant and flexible · light weight · suitable for most hydraulic fluids and chemicals · resistance to pulsation · Temperature range: -76°F to +212°F continuous service (short time up to +248°F)

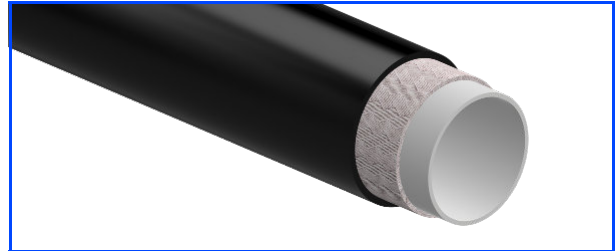

code: TECALAN- hose	DN	inside – Ø inch	outside-Ø mm	pressure rates in bar (dynamic)			min. bending radius in mm	weight kg/100 m	part no.
				+20°C	+50°C	+80°C			
AF HH 6,3	6	1/4"	11,3	255	225	190	40	7,5	2.41 10 06.1
AF HH 8	8	5/16"	14,9	280	250	220	60	14,1	2.41 10 08.1
AF HH 10	10	3/8"	17,5	200	180	165	80	17,2	2.41 10 10.1
AF HH 13	12	1/2"	22,5	160	140	120	100	27,5	2.41 10 12.1

Assembly with TECALAN press-couplings is standard in general.

Construction / Material: polyester elastomer core tube, 1 polyester braid, outside layer polyester elastomer.