


TECALAN – Push-in couplings for hose and tubing

TR-insert for cutting ring screw connection (CE) following DIN 2353

Push-in couplings for TECALAN plastic tubes and hose series AF, AF GE, N and ZF, for cutting ring screw connections, without ring and screw cap.

Material: steel, zinc, plated

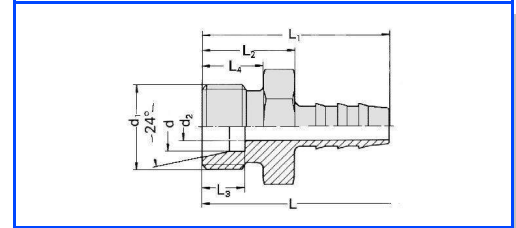

code: TR-insert	DN	dimensions in mm				for inside-Ø in mm	part-no.
		d	d ₁	d ₂	L ₁		
CE 6 L - 4	4	6	M 12 x 1,5	3	30	4	4.12 73 40.7
CE 6 L - 5	5	8	M 12 x 1,5	3,8	31	5	4.12 73 42.7
CE 8 L - 5	5	8	M 14 x 1,5	3,8	31	5	4.12 73 46.7
CE 8 L - 6	6	8	M 14 x 1,5	4,8	31	6	4.12 73 50.7
CE 8 L - 8	8	8	M 14 x 1,5	6,3	38	8	4.12 73 60.7
CE 10 L - 8	8	10	M 16 x 1,5	6,3	38	8	4.12 73 68.7
CE 10 L - 10	10	10	M 16 x 1,5	8	38	9 und 10	4.12 73 70.7
CE 12 L - 10	10	12	M 18 x 1,5	8	39	9 und 10	4.12 73 79.7
CE 15 L - 12*	12	15	M 22 x 1,5	10	52	12 und 12,5	4.12 73 02.7

*TECALAN assemblies with these couplings must not be submitted to working pressures exceeding 80% of the pressure rates shown !