


# TECALAN – low pressure hose with constant working pressure

## Type DKG-B

low pressure rubber hose, textile reinforced, according DIN 73379 Type B as feed pipe for technical fluids.

Abrasion resistant and flexible · suitable for gasoline, diesel, most hydraulic fluids, lubricants, coolant and waterbased liquids · Temperature range: -30°F to +195°F continuous service (short time up to +230°F)

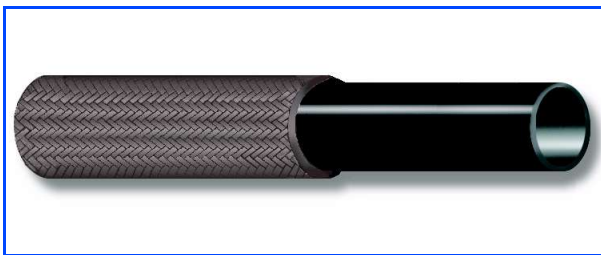

code: TECALAN- hose	inside- Ø inch	outside- Ø mm	wall- thickness in mm	pressure rates in psi			min. bending radius in mm	weight kg/100 m	part no.
				service	test	burst			
DKG - B 2	1/8"	7,0	1,9	145	220	435	40	3,2	0201010085
DKG - B 3	3/16"	9,5	2,5	145	220	435	50	6,0	0201010086
DKG - B 4	7/32"	10,5	2,5	145	220	435	50	7,0	0201010087
DKG - B 6	19/64"	12,5	2,5	145	220	435	65	8,9	0201010088
DKG - B 8	23/64"	14,0	2,5	145	220	435	65	10,2	0201010089
DKG - B 10	29/64"	17,5	3,0	145	220	435	95	15,9	0201010090
DKG - B 13	35/64"	22,0	4,0	145	220	435	120	27,3	0201010091

Assembly with TECALAN press-couplings is standard in general.

**Construction / Material:** inner tube synthetic NBR rubber, outside layer vulcanized textile braiding.