


TECALAN – screw fittings for hose Type AF and BF

F-insert with cutting ring screw connection (CE) following DIN 2353

Reusable screw fittings for TECALAN hose series Type AF and BF, for cutting ring screw connections, 24° cone, without cutting ring and screw cap.

Material: steel, zinc, plated

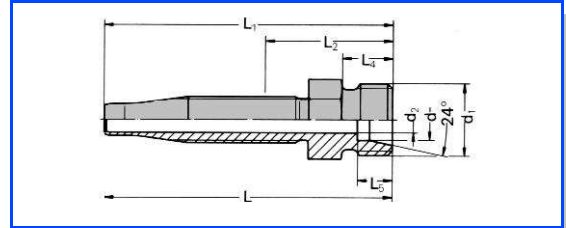

code: F-insert	DN	d	d ₁	d ₂	hex.	L ₁	L ₂	L ₄	for TECALAN hose type:	part-no.
CE 6 L - 4 F	4	6	M 12 x 1,5	4	12	39,5	22	10	AF 4, BF 4, AF 4-Cu, BF 4-Cu	4.12 55 74.2
CE 8 L - 6,3 F	6	8	M 14 x 1,5	5,2	14	56,5	25	10	AF 6,3, BF 6,3, AF 6,3-Cu, BF 6,3-Cu	4.12 64 24.1
CE 10 L - 8 F	8	10	M 16 x 1,5	6,8	17	59	27	11	AF 8, BF 8	4.12 64 26.1
CE 12 L - 8 F	8	12	M 18 x 1,5	6,8	19	59	27	11	AF 8, BF 8	4.12 64 27.1
CE 12 L - 10 F	10	12	M 18 x 1,5	8,8	19	65,5	30	11	AF 10, BF 10, BF 10-Cu	4.12 64 28.1
CE 22 L - 19 F	20	22	M 30 x 2	17	30	85	39	14	BF 19	4.12 64 61.1
CE 6 S - 4 F	4	6	M 14 x 1,5	4	14	42	25	12	AF 4, BF 4, AF 4-Cu, BF 4-Cu	4.12 65 74.2
CE 10 S - 6,3 F	6	10	M 18 x 1,5	5,2	19	59,5	28	12	AF 6,3, BF 6,3, AF 6,3-Cu, BF 6,3-Cu	4.12 64 39.1
CE 12 S - 8 F	8	12	M 20 x 1,5	6,8	22	60	28	12	AF 8, BF 8	4.12 64 42.1

* Consider L₂ for determination total hose length