


TECALAN – screw fittings for hose Type AF and BF

F-insert with female swivel (D/DR) following DIN 3863

Reusable screw fittings for TECALAN hose series Type AF and BF, with metric female swivel

Material: steel, zinc, plated

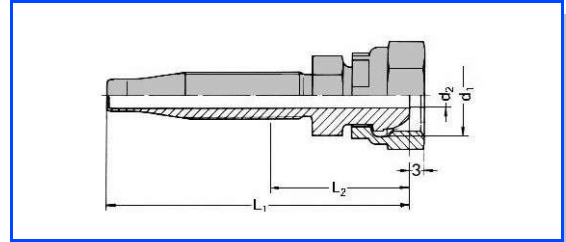

code: F-insert	DN	d ₁	d ₂	hex. ₁	hex. ₂	L ₁	L ₂ *	for TECALAN hose type:	part-no.
D 12 X 1,5 - 4 F	4	M 12 x 1,5	4	10	17	42,5	25	AF 4, BF 4, AF 4-Cu, BF 4-Cu	4.12 60 40.3
D 14 X 1,5 - 6,3 F	6	M 14 x 1,5	5,2	12	17	58,5	27	AF 6,3, BF 6,3, AF 6,3-Cu, BF 6,3-Cu	4.12 66 18.1
D 16 X 1,5 - 6,3 F	6	M 16 x 1,5	5,2	14	19	59,5	27	AF 6,3, BF 6,3, AF 6,3-Cu, BF 6,3-Cu	4.12 66 20.1
D 16 X 1,5 - 8 F	8	M 16 x 1,5	6,8	14	19	61	29	AF 8, BF 8	4.12 60 75.1
D 18 X 1,5 - 8 F	8	M 18 x 1,5	6,8	17	22	63	31	AF 8, BF 8	4.12 60 77.1
D 18 X 1,5 - 10 F	10	M 18 x 1,5	8,8	17	22	69,5	33	AF 10, BF 10, BF 10-Cu	4.12 60 85.1
D 22 X 1,5 - 10 F	10	M 22 x 1,5	8,8	22	27	70,5	34	AF 10, BF 10, BF 10-Cu	4.12 60 93.1
DR 1/4" - 4 F	4	R 1/4"	4	12	17	42,5	25	AF 4, BF 4, AF 4-Cu, BF 4-Cu	4.12 60 46.1
DR 1/4" - 6,3 F	6	R 1/4"	5,2	12	17	58,5	27	AF 6,3, BF 6,3, AF 6,3-Cu, BF 6,3-Cu	4.12 67 40.1
DR 1/4" NPSM - 4 F	4	1/4"-18 NPSM	4	12	17	42,5	25	AF 4, BF 4, AF 4-Cu, BF 4-Cu	4.12 60 44.3
DR 1/4" NPSM - 6,3 F	6	1/4"-18 NPSM	5,2	12	17	58,5	27	AF 6,3, BF 6,3, AF 6,3-Cu, BF 6,3-Cu	4.12 67 41.1
DR 3/8" - 10 F	10	R 3/8"	8,8	17	22	69,5	33	AF 10, BF 10, BF 10-Cu	4.12 67 50.1

* Consider L₂ for determination total hose length